

Print Ready PDF Checklist

A print ready PDF must meet certain criteria for your file to print without problems.

Please supply print ready PDF files with trim marks and 3mm bleed.

CMYK Colour space

Please supply the file as four-colour process CMYK and not RGB colour space.

Actual Size

The document page size will be the finished trim size.

Fonts

Fonts are to be embedded or converted to outlines so no fonts are needed.

Images

All images should be embedded. Image resolution needs to be 300dpi at 100% of the final image size.

Bleed

Files need to be supplied with 3mm bleed. This means that any art should extend past the trim line by 3mm to ensure there are no white borders after trimming. If the design does not go to the edges of the file, no bleed is required.

Printer's Marks


All files should include trim marks. Any trim, score, or fold marks need to be outside the live print area.

Black Text

Black text needs to be 100% black and not a mixture of CMYK.

White Text

Double check that white text is not set to overprint.

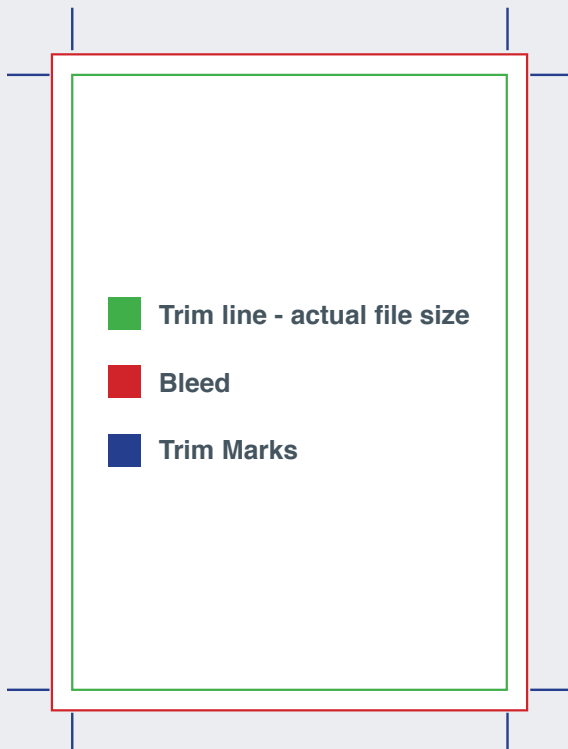


Pull-Up Banner Layout Specifications

Add 5mm bleed to both the left and right side of the banner files.

850 Model



1200 Model

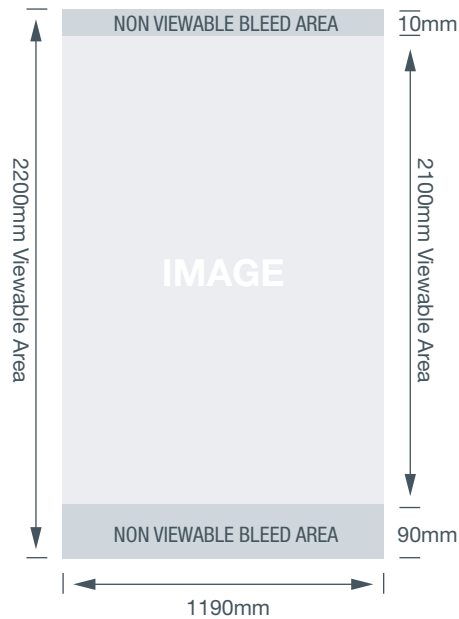

MARKMEDIA
MAKING YOUR MARK • CONCEPT DESIGN PRINT

14a/13 Sunderland Street, Moonah TAS 7009

Phone: 03 6228 4441 Email: martin@markmedia.com.au

© @mark.media.printing www.markmedia.com.au